
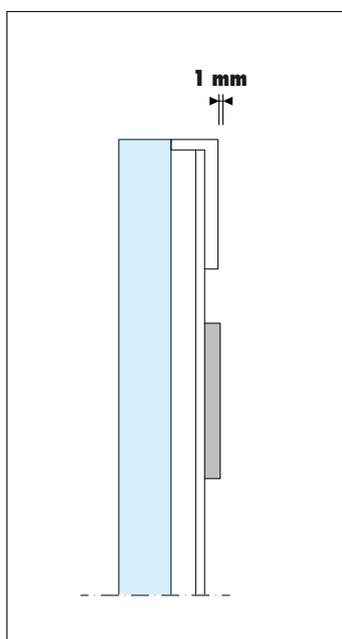


FOLIO




USER MANUAL

magnets

01

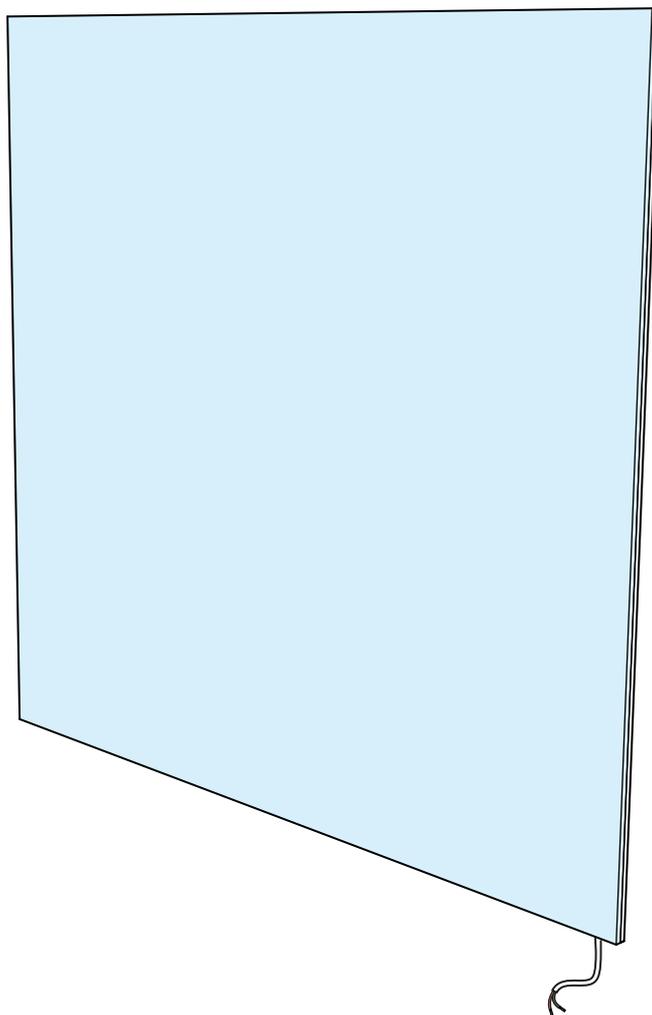



FOLIO[®]
LIGHT NEW DIMENSION

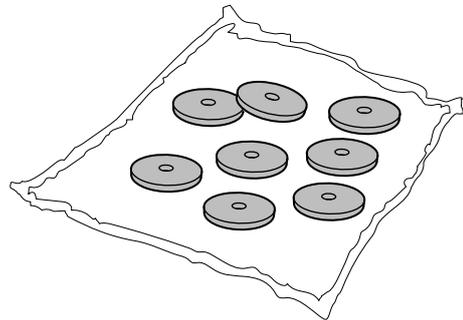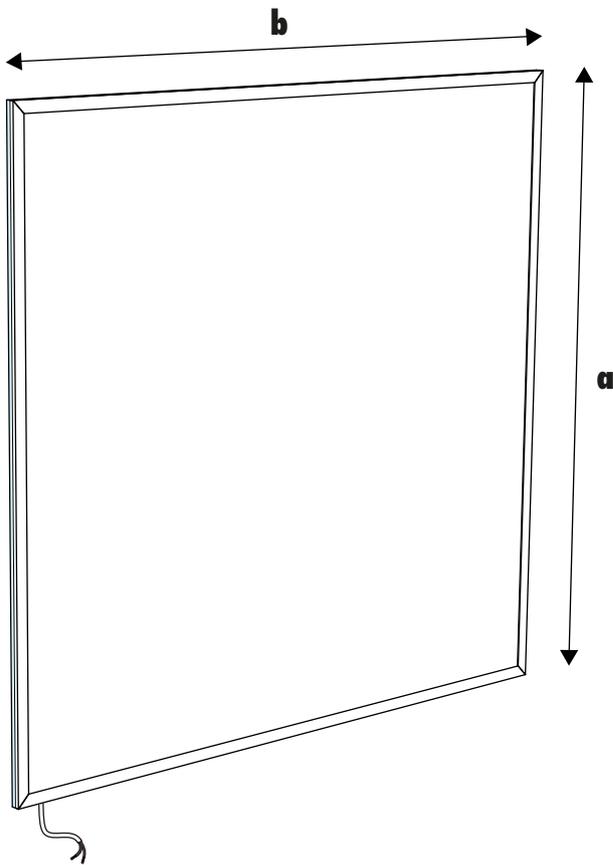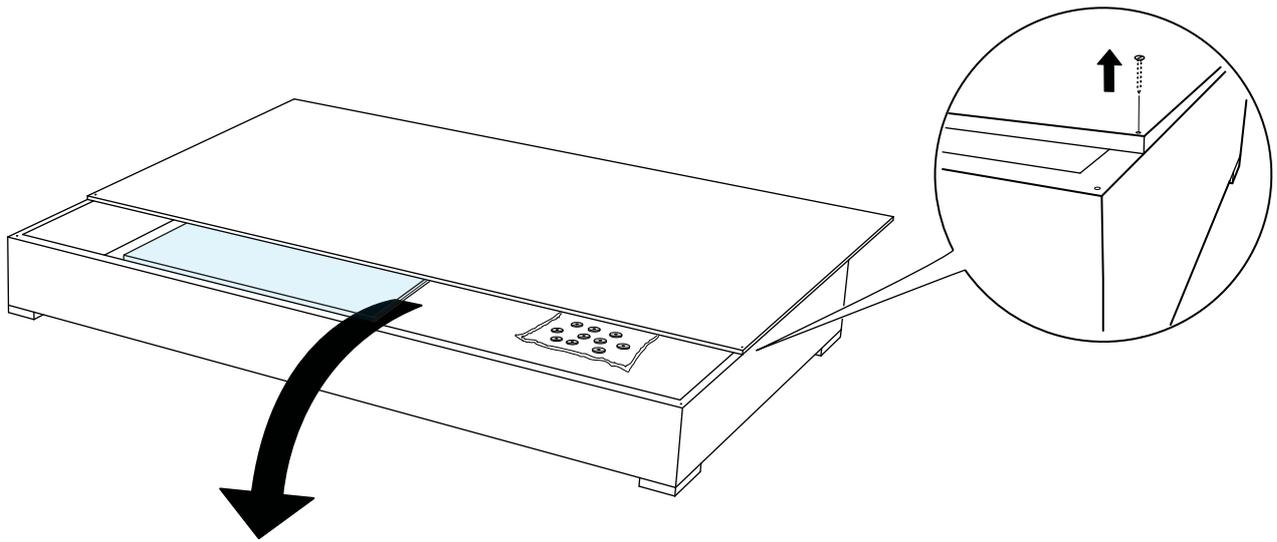

Inside the crate will find:

- Folio lighting panel(s)
- Magnets for wall mounting


1

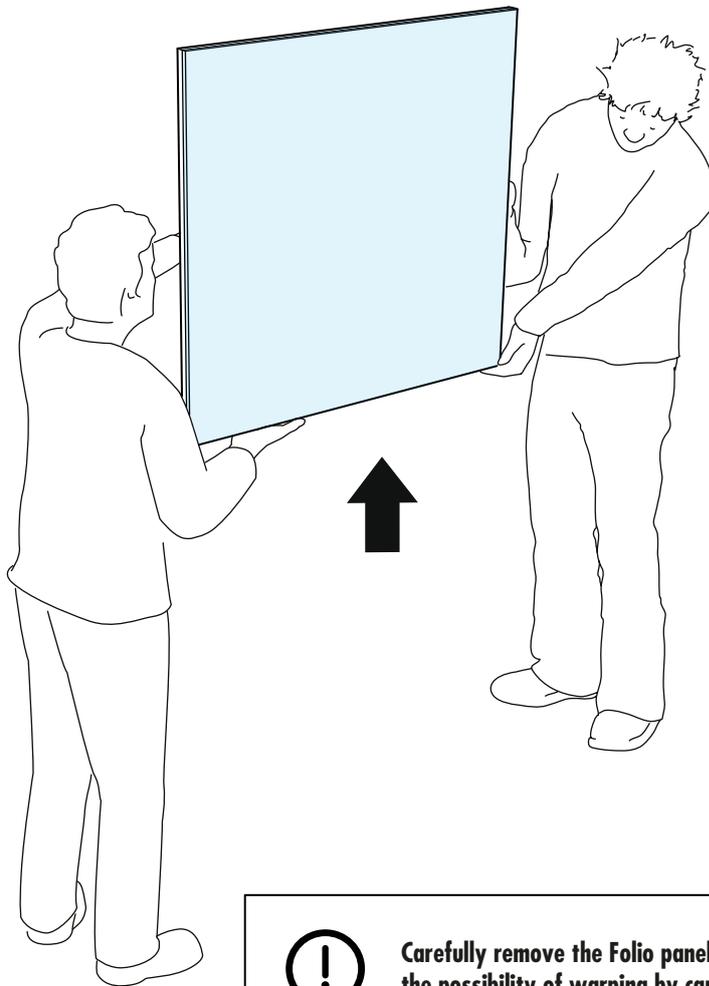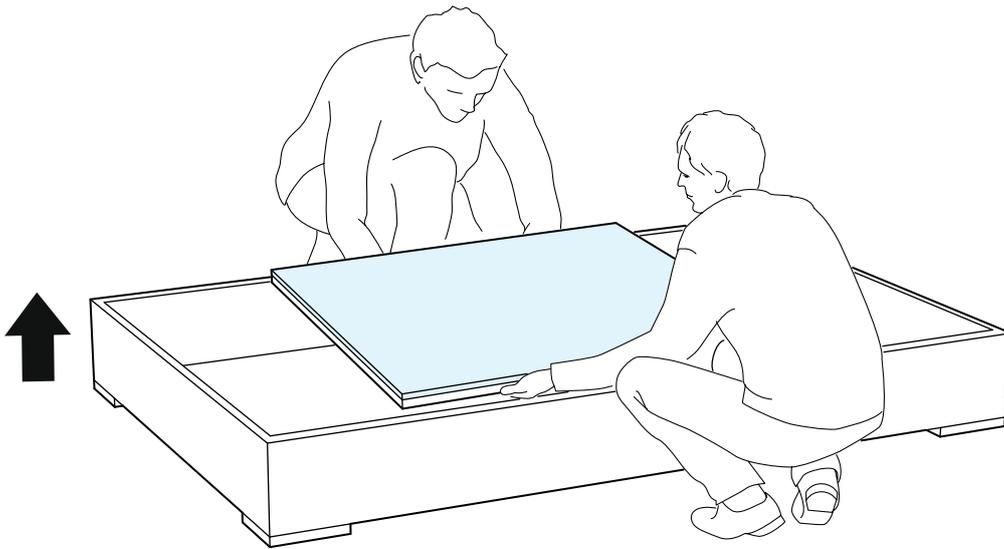

Carefully remove the Folio panel(s) from the crate avoiding the possibility of warping by carrying it in a vertical position.

Carry the panel always keeping it in the same vertical position, avoiding hitting, pulling or damaging the electrical cables. Avoid contact of Folio panels with liquids.



2

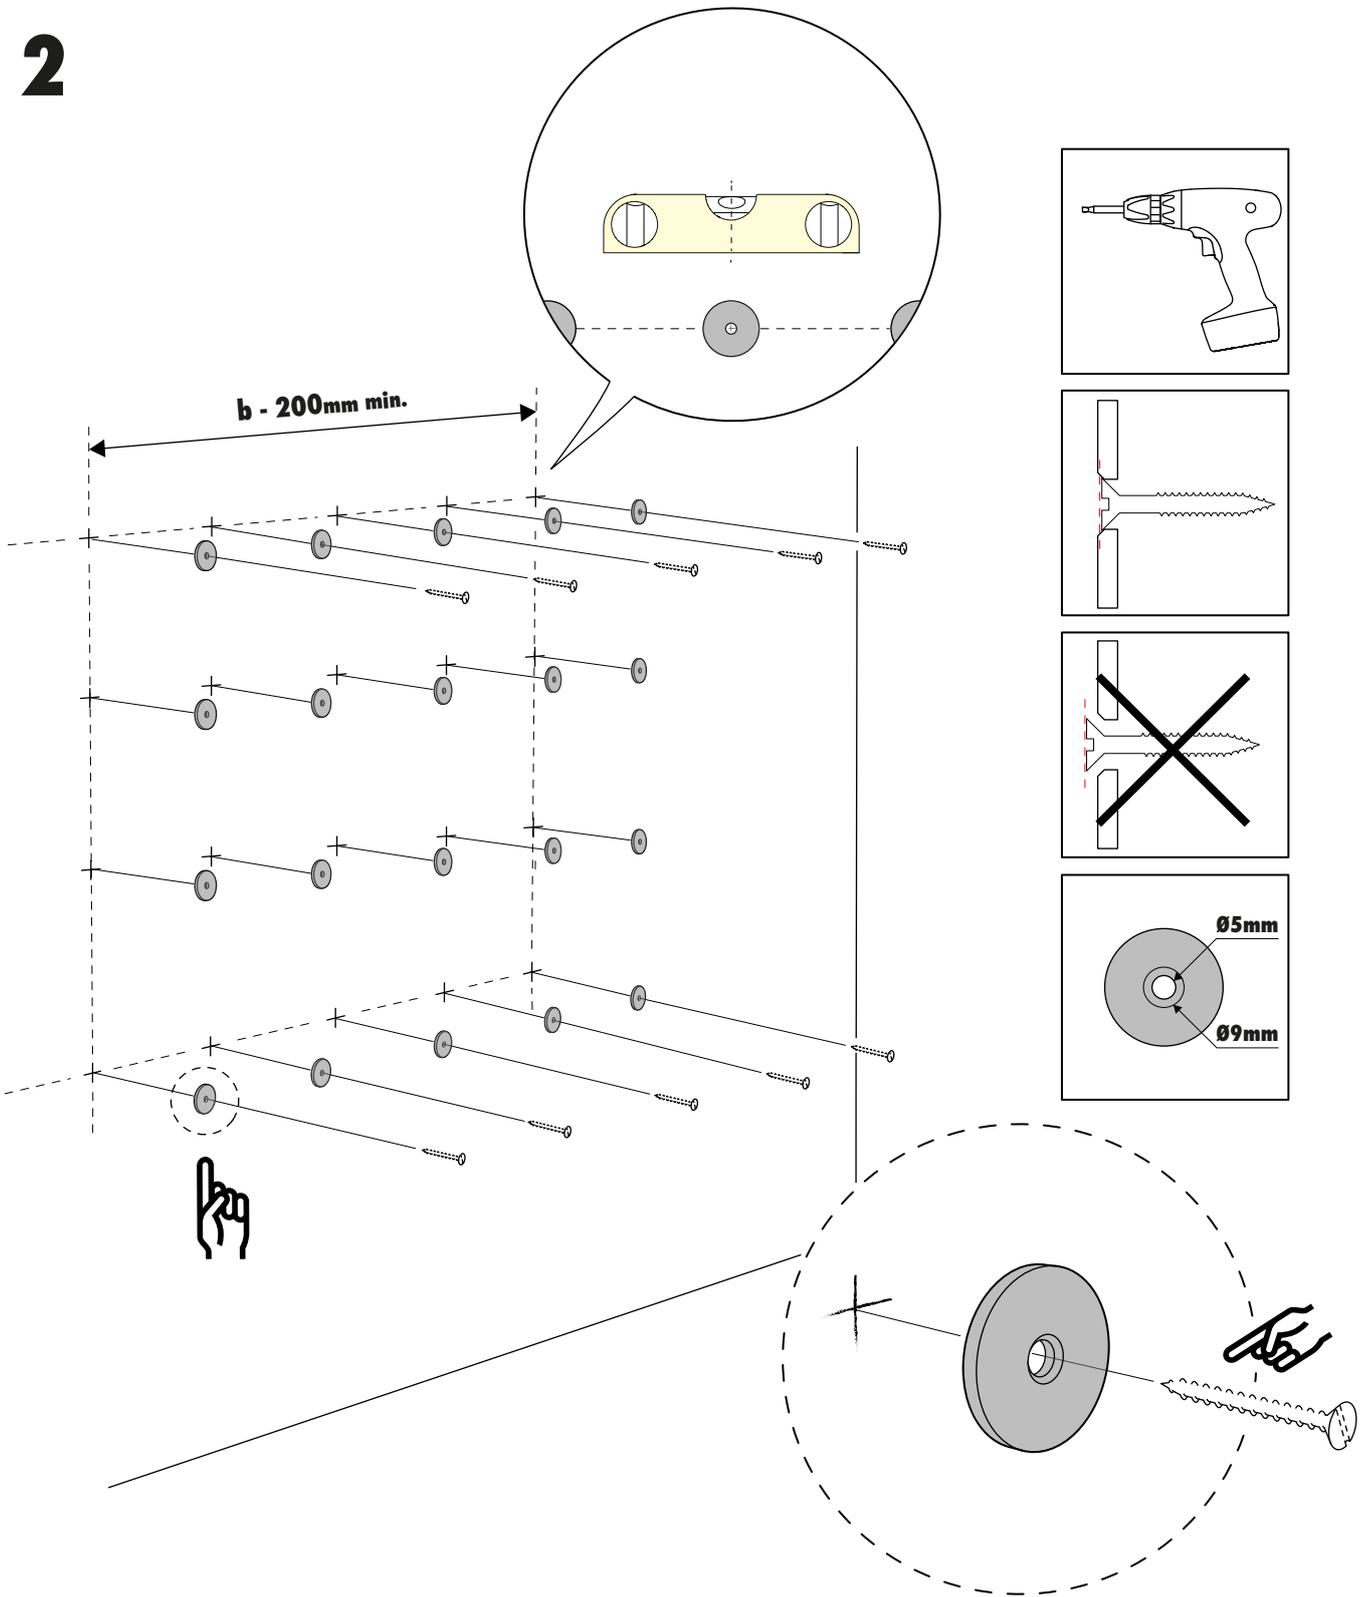

 **Fix the magnets to the wall with screws or other adequate fixing systems paying attention that:**

- The magnets must be coplanar to one another.
- All the magnets are positioned neatly and proportionally to the surface.
- The "head" of the screw while fixing the brackets must not protrude from the magnet.
- The magnets are fixed in an area that is 200mm less than the external dimension of the Folio panel. (see page 5)

4


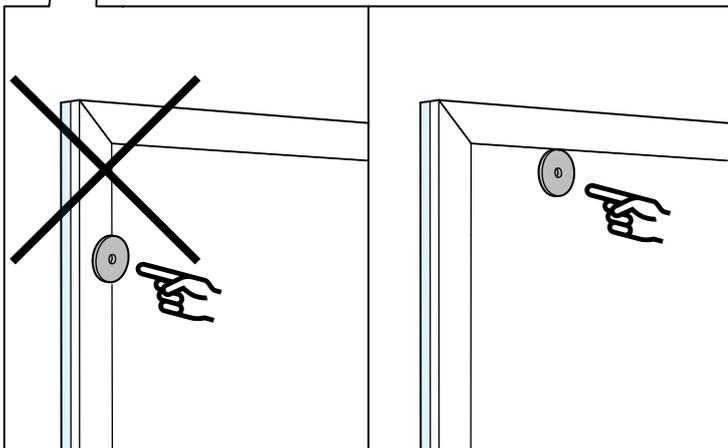
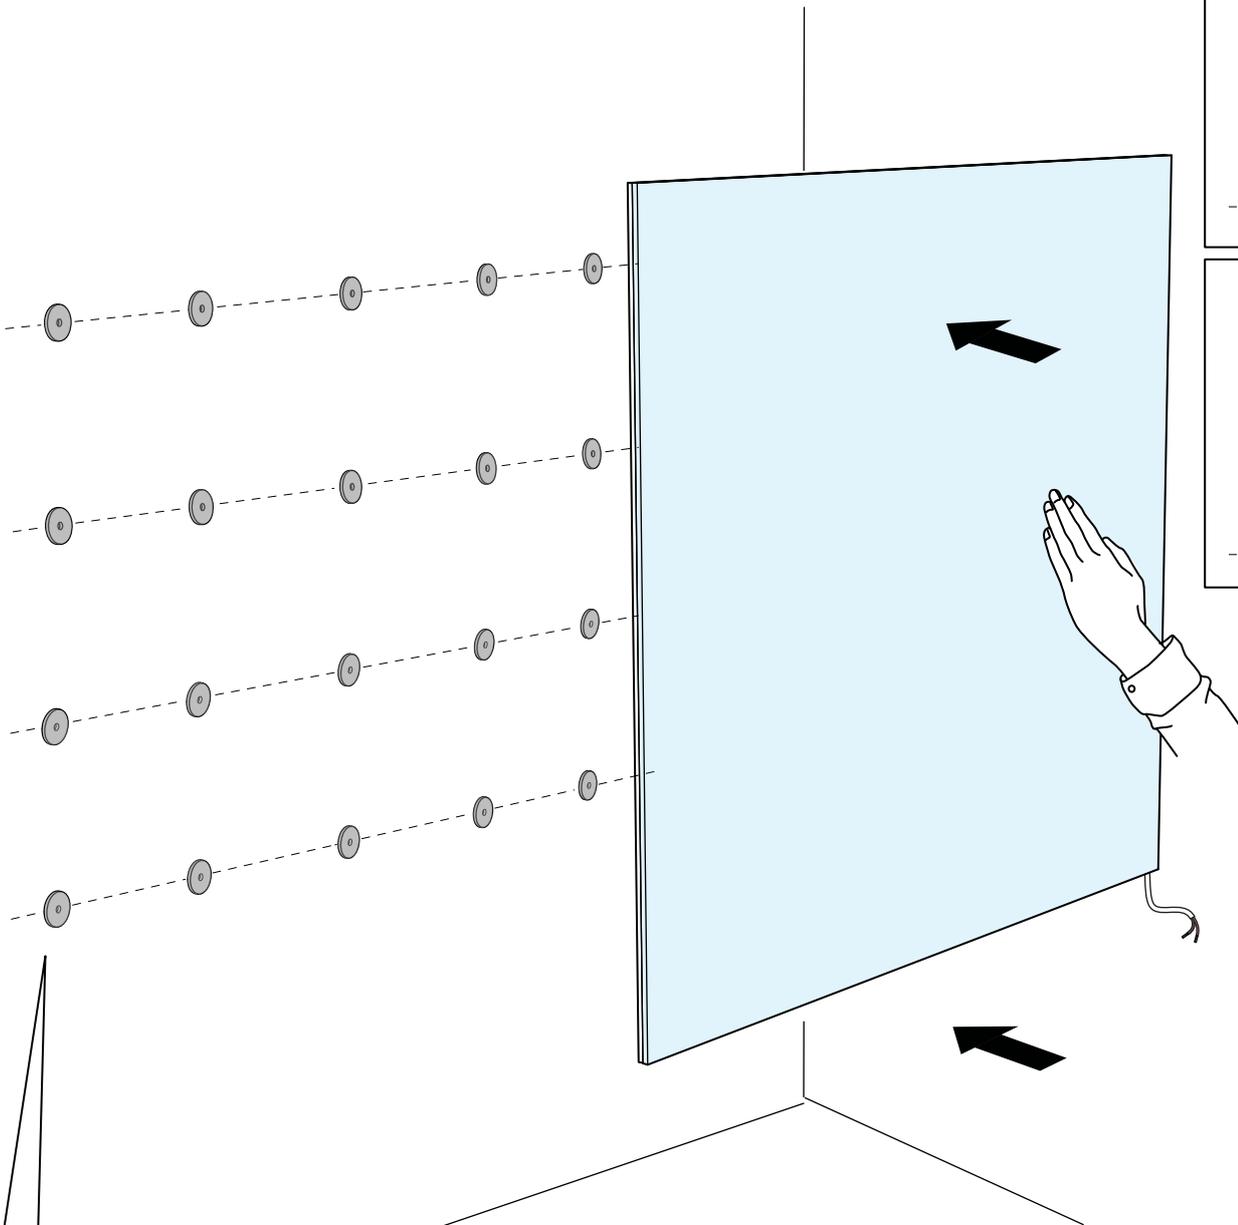


Connect the Folio panel to the magnets.




Paying attention to:

- **Not overlapping the magnets to the aluminum profile on the external perimeter of the panel.**
- **Adjust the Folio panel so that the edge of the first row of magnets touches the rim.**

5

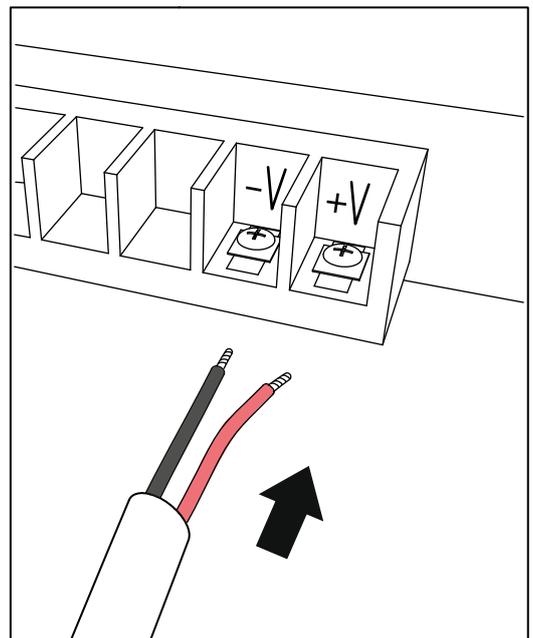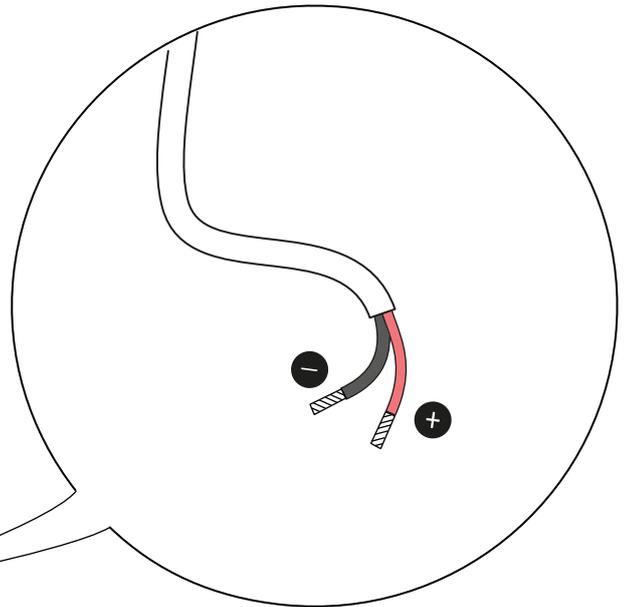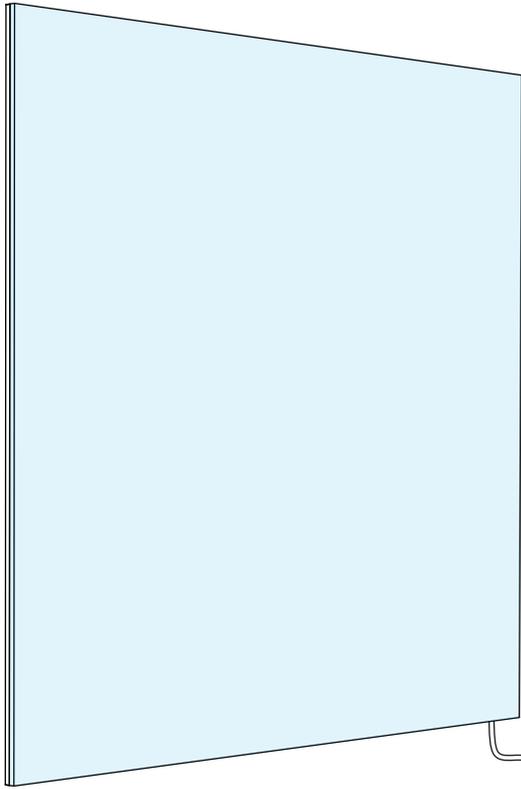

After fixing the Folio panel and verifying its stability, connect the power supply cable to the driver following the instructions labeled "electrical connections"

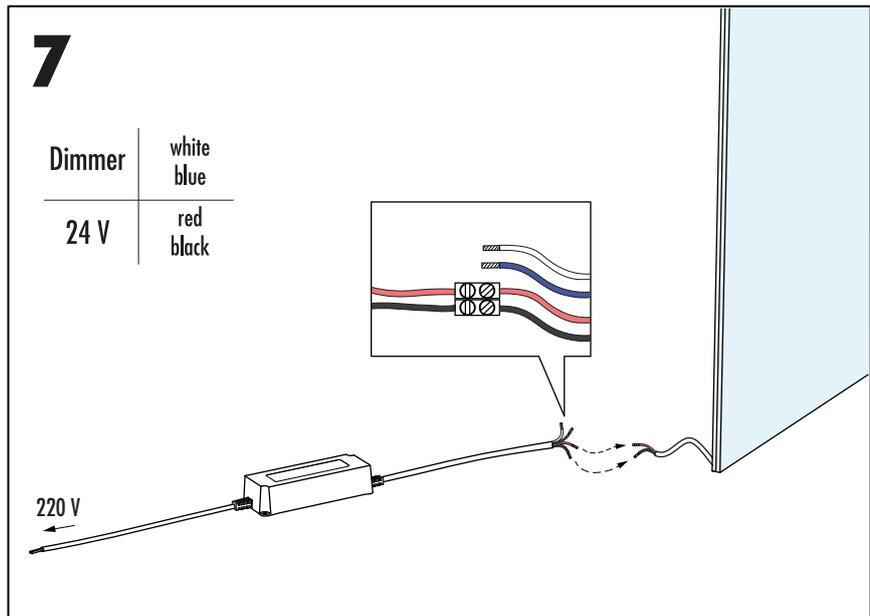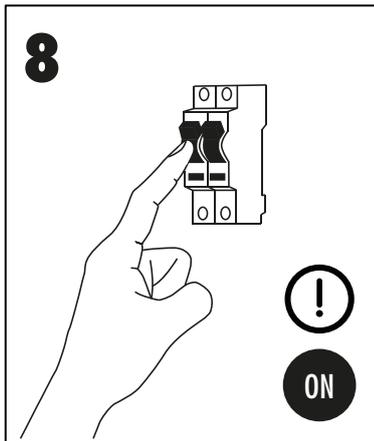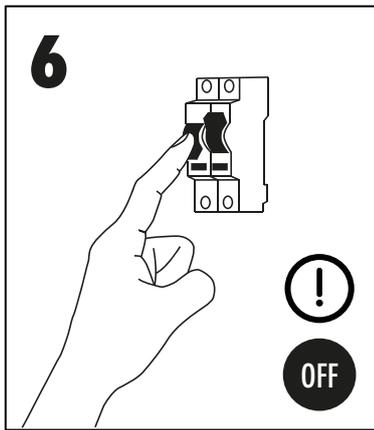

! Make sure to disconnect the power supply, connect the cable of the LED panel to the driver as shown in step 7. Connecting the red cable \oplus of the panel with the red cable \oplus of the driver and the black cable \ominus of the panel to the black cable \ominus of the driver. Subsequently connect the driver to the electrical system with the 220 V cable and power the system.

WARNING:

Consult the company Cifralluminio before intervening in any way on the FOLIO panels. For any doubts on the functioning of the device or on its maintenance consult Cifralluminio.

- Do not manipulate or open the Folio panel
- Do no flex/bend the panel
- Do not unscrew/tamper with any screw on the panel
- Do not spray/pour directly on the panel any kind of liquid/detergent
- Keep in a dry place
- Keep away from heat sources
- Do not expose to direct sunlight
- Keep away from combustible substances
- Avoid contact with vapors, fumes, dust, gas and liquids
- Avoid accumulation of electrostatic charges
- Avoid hitting or friction



Use class II transformers with adequate absorption with regards to the consumption of the Folio panel, with an exit current of 24V and with SELV exits EN 61347-2-13 compliant. It is recommended to connect maximum 4/5 Folio panels to one driver.

DIMMING:

Dimmable with:
- PWM - DALI - DMX