



REF.
DATE

For each item select the request option


1

SLIM.13

FOLIO®

Product type	Quantity	☐ 1 CCT	☐ 2 Lens	☐ 3 Dimmerability	☐ 4 Aluminum finish
SLIM					

[mm] [in]



LIGHT SOURCE

LED type:	186 LED/m (pitch 5,31mm)
LED Voltage:	24 Vdc
LED Duration:	50 000 h.
Power:	10-15 W/mt
Delivered Lumen:	☒ 22.6W 500mA - 2397 lm/m (Op20), 2037 lm/m (Op35)
	☒ 15.6W 350mA - 1680 lm/m (Op20), 1408 lm/m (Op35)
Efficiency:	☒ 10W/m 239.7 lm/W (Op15), 203.7 lm/W (Op25), 168 lm/W (Op15), 140.8 lm/W (Op25)
	☒ 15W/m 159.8 lm/W (Op15), 135.8 lm/W (Op25), 112 lm/W (Op15), 93.8 lm/W (Op25)
CRI:	> 90
R9:	> 50 > 80
TM30:	Rf: 91 Rg: 100
SDCM:	2
Color Temperature (CCT):	☐ 2700K
☐ 1	☐ 3000K
	☐ 3500K
	☐ 4000K
	☐ 5000K
	on request: 2000K, 2200K, 2500K, 6500K

GENERAL SPECS.

Dimensions:	13 x 13 mm / 0.51 x 0.51 in
Length:	max 2000 mm / 78.7 in (custom)
IP:	40

OPTICS

Optic Type:	lens
Beam Angle (BA°)	☐ 15°
☐ 2	☐ 20°x40°
	☐ 25°
	☐ 45°

The Linear LED range redefines how light interacts with surfaces. Designed to meet the most demanding bespoke projects, these linear systems offer endless possibilities in terms of length, output, and placement. By sharing a common technical DNA with our point-source elements, they guarantee absolute visual harmony and a streamlined installation process, making them the ideal choice for comprehensive lighting layouts. Every detail is engineered to transform functional lighting into a distinctive architectural element.



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

2

SLIM.13

FOLIO®

Product type	Quantity	☐ 1 CCT	☐ 2 Lens	☐ 3 Dimmerability	☐ 4 Aluminum finish
SLIM					


ALUMINIUM FINISHES

☐ 4

RAL/NCS/Pantone:


Polished finish:

Color finish:

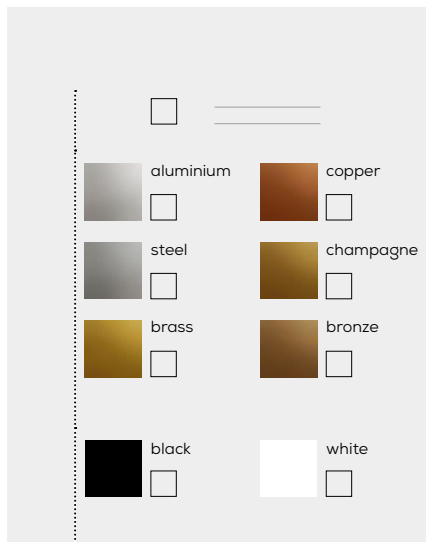

LENS INFO


Beam Angle (BA°): 120°



INSTALLATION

Magnetic fastening

1. Attach the magnetic plate to the material
2. Snap the magnet to the magnetic plate

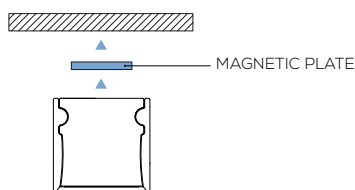

POWER CABLE EXIT

Power cable: 1000 mm / 39 in


OPTION .A

EXIT FROM THE END CAP




OPTION .B

EXIT FROM THE SIDE




OPTION .C

EXIT FROM BELOW




POSITION GUIDELINES


OPTION .A



OPTION .B



OPTION .C



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.