



REF.  
DATE


For each item select the request option

1

# LIGHT.26\_adj\_TR

FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| LIGHT.26     |          |       |        |               |                   |               |

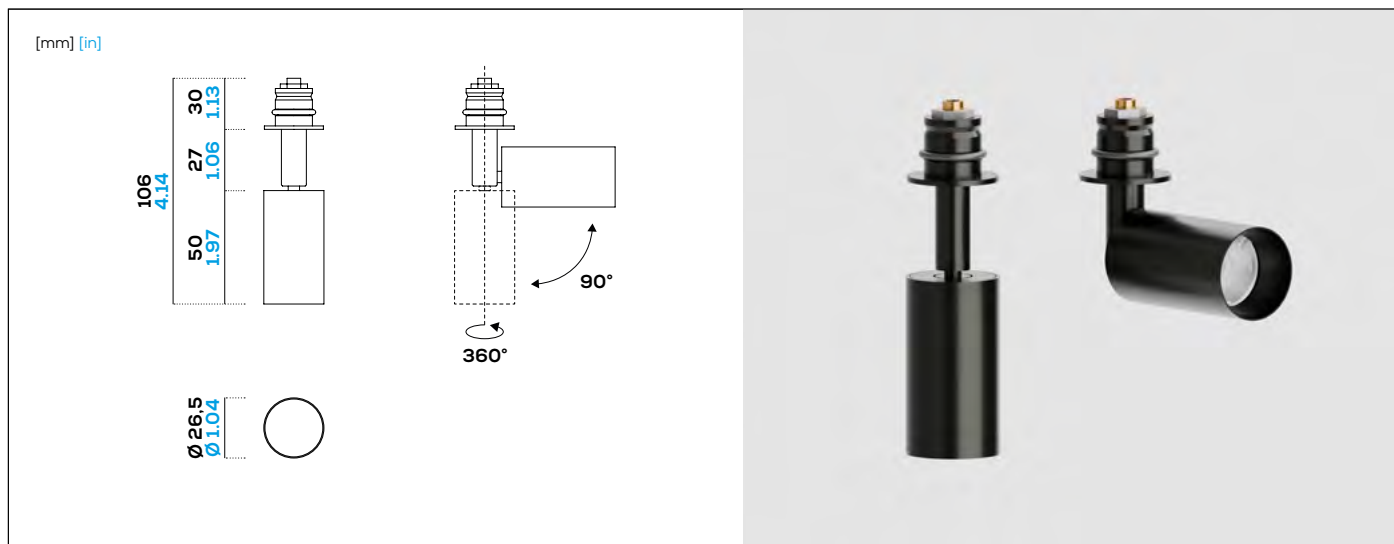

## GENERAL SPECS.

|           |                                       |
|-----------|---------------------------------------|
| Weight:   | 0,08 kg                               |
| Movement: | Adjustable: 360° rotation, 0-90° tilt |
| IP:       | 20                                    |

The Spot.Mate system is a highly versatile range of spotlights, designed to meet the most diverse architectural and lighting needs. Available in four sizes, the spotlights can be installed on various surfaces, offering multiple features and movement possibilities. Each product is entirely customizable in various aspects to perfectly suit any specific project.



## LIGHT SOURCE

|                          |                                        |
|--------------------------|----------------------------------------|
| LED type:                | Nichia                                 |
| LED Amperage:            | 700 mA                                 |
| LED Duration:            | 50 000 h.                              |
| Power:                   | 2.1 W                                  |
| Delivered Lumen:         | 220 lm                                 |
| Efficacy:                | 104.8 lm/W                             |
| Candela:                 | 74.8 cd                                |
| CRI:                     | > 90                                   |
| R9:                      | > 50                                   |
| TM30:                    | Rf: 91 Rg: 100                         |
| SDCM:                    | 3                                      |
| Color Temperature (CCT): | <input type="checkbox"/> 2700K         |
| <input type="checkbox"/> | 3000K                                  |
| <input type="checkbox"/> | 3500K                                  |
| <input type="checkbox"/> | 4000K                                  |
| <input type="checkbox"/> | on request: 2000K, 2200K, 2500K, 5000K |

## OPTICS

|                                     |                              |
|-------------------------------------|------------------------------|
| Optic Type:                         | lens                         |
| Beam Angle (BA°)                    | <input type="checkbox"/> 12° |
| <input checked="" type="checkbox"/> | 18°                          |
| <input type="checkbox"/>            | custom on request            |

## ELECTRICAL

|                                     |                                 |
|-------------------------------------|---------------------------------|
| Voltage:                            | 24 Vdc (Constant Voltage)       |
| Class:                              | Class 3 24V                     |
| Driver:                             | DC/DC 24 V                      |
| Output current:                     | 700 mA                          |
| Dimmability:                        | <input type="checkbox"/> 0-10 V |
| <input checked="" type="checkbox"/> | 1-10 V                          |
| <input type="checkbox"/>            | DALI                            |
| <input type="checkbox"/>            | DMX                             |
| <input type="checkbox"/>            | Bluetooth                       |
| <input type="checkbox"/>            | PUSH                            |
| <input type="checkbox"/>            | Casambi                         |

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

2

# LIGHT.26\_adj\_TR

FOLIO®


| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmerability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|-----------------|-------------------|---------------|
| LIGHT.26     |          |       |        |                 |                   |               |

## ALUMINIUM FINISHES

4

RAL/NCS/Pantone:


Polished finish:



Brushed finish:



Galvanic finish:




## ACCESSORIES

5

☐ Honeycomb


☐ Shoot

☐ Trimless Kit




## LENS INFO

Beam Angle (BA°): 12°



Beam Angle (BA°): 18°



## APPLICATIONS

Folio Opal







Folio Zero



Forniture



Drywall



Cut out: Ø 18,5 mm / Ø 0.72 in



Clear volume: 40 mm / 1.57 in

Cut out: Ø 18,5 mm / Ø 0.72 in



Clear volume: 40 mm / 1.57 in

Cut out: Ø 18,5 mm / Ø 0.72 in



Clear volume: 40 mm / 1.57 in

Cut out: Ø 18,5 mm / Ø 0.72 in



Clear volume: 40 mm / 1.57 in

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

3

# LIGHT.26\_adj\_TR


FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| LIGHT.26     |          |       |        |               |                   |               |

## MOUNTING INSTRUCTION


### STEP 1: Hole preparation

**Folio Opal:** Pre-drilled (no action required).  
**Drywall / Furniture:** Drill  $\varnothing 18,5$ mm hole.

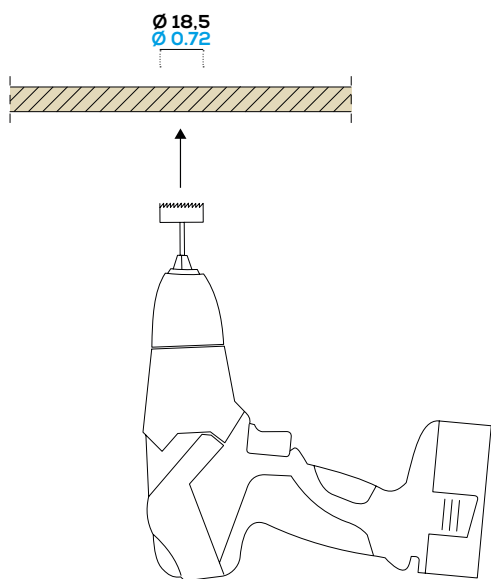


### STEP 2: Cable connection

Ensure a min. **40 mm** internal height.  
Pull down the **24V DC** cable through the hole and pull up the spot.  
Connect the two parts.

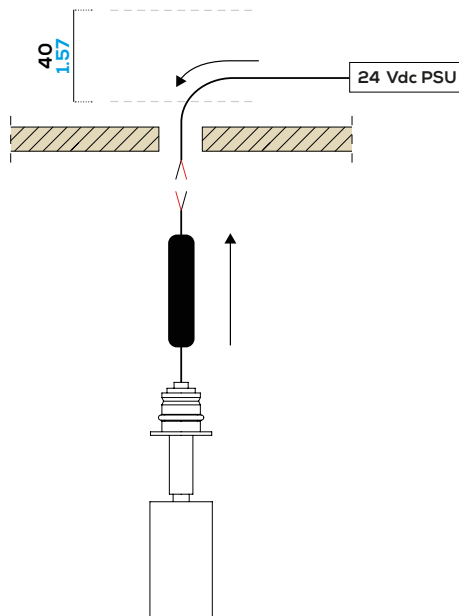



### STEP 3: Spot Insertion

Push the spot upward into the hole.  
The O-Ring will prevent the spotlight from falling.

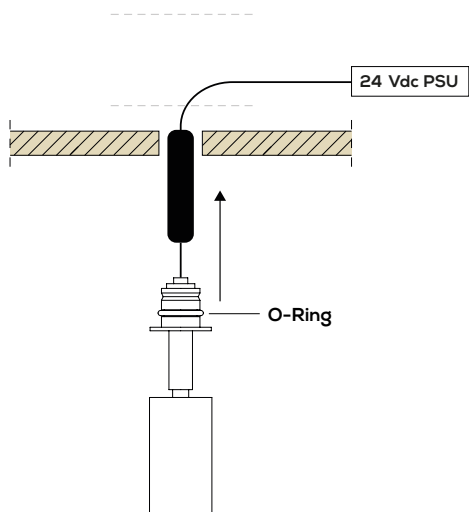

### STEP 4: Installation

Once fully inserted, ensure the trim is flush with the surface.  
The spotlight is now ready for use.

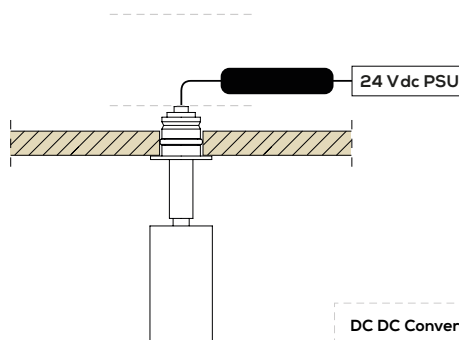

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option


LIGHT.26\_adj\_TR



| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmerability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|-----------------|-------------------|---------------|
| LIGHT.26     |          |       |        |                 |                   |               |

FEATURES

360° rotation, 0-90° tilt

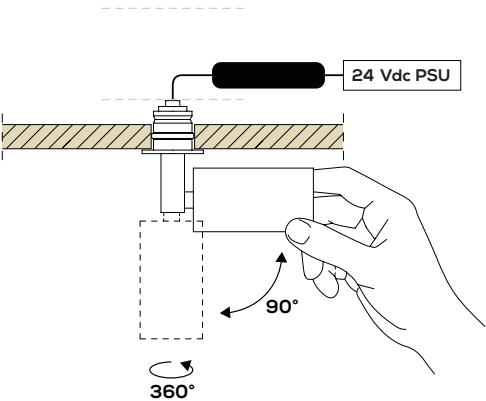

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio Opal panels' power cables are indicative.