



REF.  
DATE


For each item select the request option

1

# MIDI.40\_track

FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| MIDI.40      |          |       |        |               |                   |               |

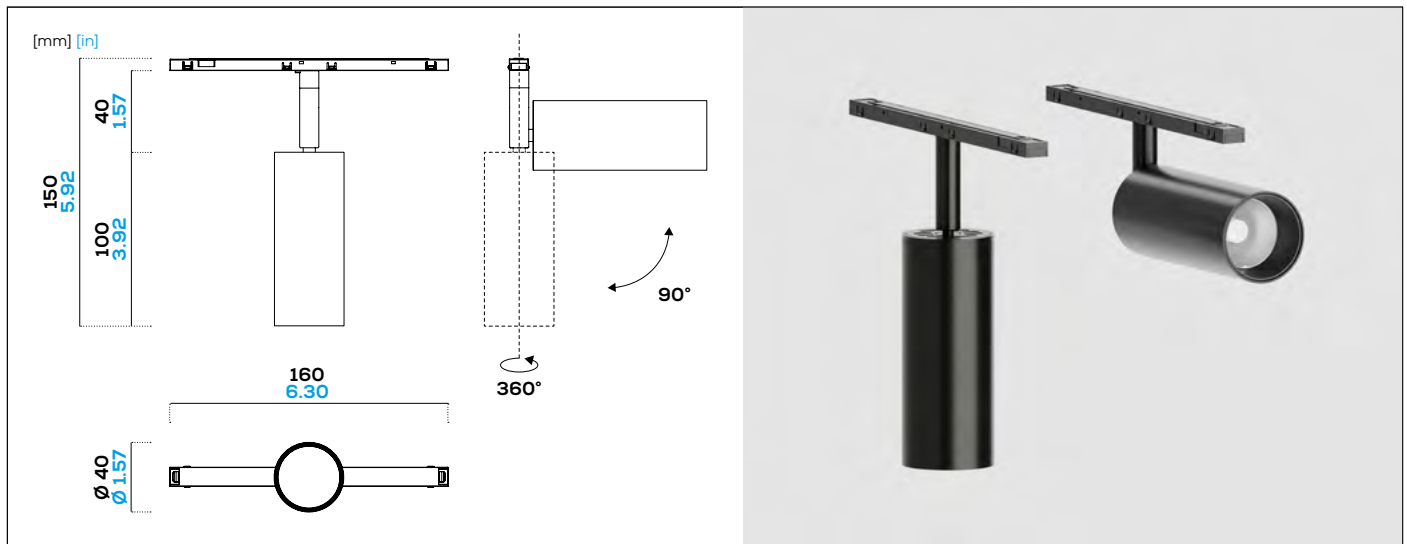

## GENERAL SPECS.

|           |                                       |
|-----------|---------------------------------------|
| Weight:   | 0,21 kg                               |
| Movement: | Adjustable: 360° rotation, 0-90° tilt |
| IP:       | 20                                    |

The Spot.Mate system is a highly versatile range of spotlights, designed to meet the most diverse architectural and lighting needs. Available in four sizes, the spotlights can be installed on various surfaces, offering multiple features and movement possibilities. Each product is entirely customizable in various aspects to perfectly suit any specific project.



## LIGHT SOURCE

|                          |                                           |
|--------------------------|-------------------------------------------|
| LED type:                | Nichia                                    |
| LED Amperage:            | 500 mA                                    |
| LED Duration:            | 50 000 h.                                 |
| Power:                   | 6.1 W                                     |
| Delivered Lumen:         | 650 lm                                    |
| Efficacy:                | 106.5 lm/W                                |
| Candela:                 | 221 cd                                    |
| CRI:                     | > 90                                      |
| R9:                      | > 50                                      |
| TM30:                    | Rf: 91 Rg: 100                            |
| SDCM:                    | 2                                         |
| Color Temperature (CCT): | <input type="checkbox"/> 2700K            |
| <input type="checkbox"/> | <input type="checkbox"/> 3000K            |
| <input type="checkbox"/> | <input type="checkbox"/> 3500K            |
| <input type="checkbox"/> | <input type="checkbox"/> 4000K            |
| <input type="checkbox"/> | on request:<br>2000K, 2200K, 2500K, 5000K |

## OPTICS

|                          |                              |
|--------------------------|------------------------------|
| Optic Type:              | lens                         |
| Beam Angle (BA°)         | <input type="checkbox"/> 12° |
| <input type="checkbox"/> | <input type="checkbox"/> 19° |
| <input type="checkbox"/> | <input type="checkbox"/> 25° |
| <input type="checkbox"/> | custom on request            |

## ELECTRICAL

|                          |                                    |
|--------------------------|------------------------------------|
| Voltage:                 | 24 Vdc (Constant Voltage)          |
| Class:                   | Class 3 24V                        |
| Driver:                  | DC/DC 24 V                         |
| Output current:          | 500 mA                             |
| Dimmerability:           | <input type="checkbox"/> 0-10 V    |
| <input type="checkbox"/> | <input type="checkbox"/> 1-10 V    |
| <input type="checkbox"/> | <input type="checkbox"/> DALI      |
| <input type="checkbox"/> | <input type="checkbox"/> DMX       |
| <input type="checkbox"/> | <input type="checkbox"/> Bluetooth |
| <input type="checkbox"/> | <input type="checkbox"/> PUSH      |
| <input type="checkbox"/> | <input type="checkbox"/> Casambi   |

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

2

# MIDI.40\_track

FOLIO®


| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| MIDI.40      |          |       |        |               |                   |               |

## ALUMINIUM FINISHES

4

RAL/NCS/Pantone:

Polished finish:



Brushed finish:



Galvanic finish:



## ACCESSORIES

5


☐ Honeycomb

☐ Snoot




## LENS INFO


Beam Angle (BA°): 12°



Beam Angle (BA°): 19°



Beam Angle (BA°): 25°





## APPLICATIONS

Folio Opal\*



Forniture



Cut out: 19x10,2 mm / 0.74x0.41 in



Cut out: 19x10,2 mm / 0.74x0.41 in



\*The fixture is supplied fully assembled and does not require additional mounting of the light source.

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

3

# MIDI.40\_track


FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| MIDI.40      |          |       |        |               |                   |               |

## MOUNTING INSTRUCTION


### STEP 1: Installation

Fully pre-assembled unit. No tools required for assembly. Snap the fixture into the track system.

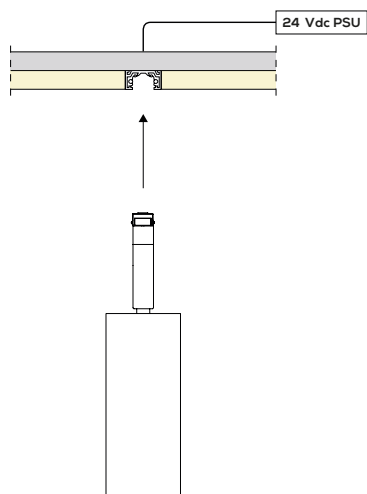


### STEP 2:

The spotlight is now ready for use.

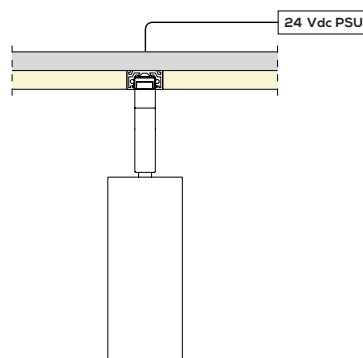

## FEATURES

360° rotation \_ 0-90° tilt

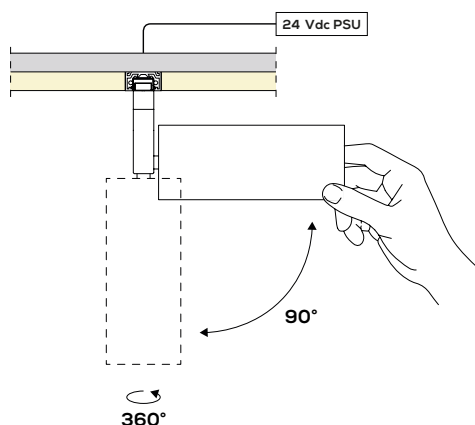

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.