



REF.
DATE


For each item select the request option

1

MIDI.40_adj_TR_snap in

FOLIO®

Product type	Quantity	1 CCT	2 Lens	3 Dimmability	4 Aluminum finish	5 Accessories
MIDI.40						

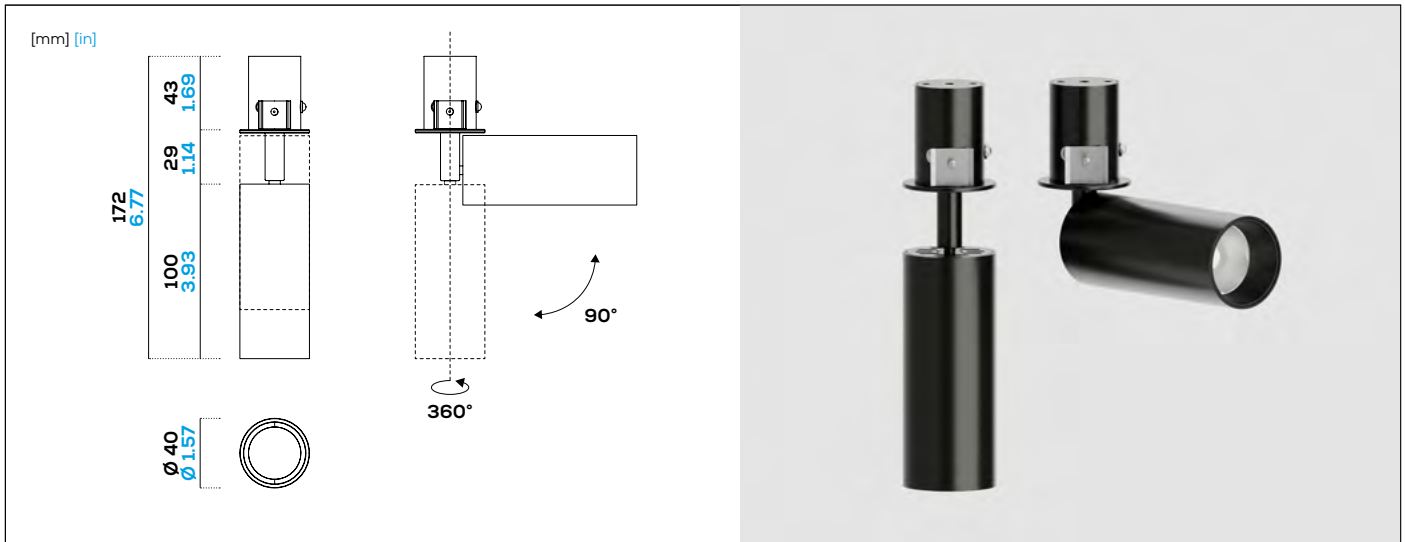

GENERAL SPECS.

Weight:	0,27 kg
Movement:	Adjustable: 360° rotation, 0-90° tilt
IP:	20

The Spot.Mate system is a highly versatile range of spotlights, designed to meet the most diverse architectural and lighting needs. Available in four sizes, the spotlights can be installed on various surfaces, offering multiple features and movement possibilities. Each product is entirely customizable in various aspects to perfectly suit any specific project.



LIGHT SOURCE

LED type:	Nichia
LED Amperage:	500 mA
LED Duration:	50 000 h.
Power:	6.1 W
Delivered Lumen:	650 lm
Efficacy:	106.5 lm/W
Candela:	221 cd
CRI:	> 90
R9:	> 50
TM30:	Rf: 91 Rg: 100
SDCM:	2
Color Temperature (CCT):	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K ☐ on request: 2000K, 2200K, 2500K, 5000K

OPTICS

Optic Type:	lens
Beam Angle (BA°)	☐ 12° ☐ 19° ☐ 25° ☐ custom on request

ELECTRICAL

Voltage:	24 Vdc (Constant Voltage)
Class:	Class 3 24V
Driver:	DC/DC 24 V
Output current:	500 mA
Dimmerability:	☐ 0-10 V ☐ 1-10 V ☐ DALI ☐ DMX ☐ Bluetooth ☐ PUSH ☐ Casambi

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

2

MIDI.40_adj_TR_snap in

FOLIO®


Product type	Quantity	1 CCT	2 Lens	3 Dimmerability	4 Aluminum finish	5 Accessories
MIDI.40						

ALUMINIUM FINISHES


4

RAL/NCS/Pantone:


Polished finish:



Brushed finish:



Galvanic finish:




ACCESSORIES

5

☐ Honeycomb


☐ Shoot

☐ Trimless Kit




LENS INFO


Beam Angle (BA°): 12°



Beam Angle (BA°): 19°



Beam Angle (BA°): 25°



APPLICATIONS

Folio Opal




Folio Zero



Furniture




Drywall



Cut out: $\varnothing$ 35 mm / $\varnothing$ 1.37 in




Clear volume: 50 mm / 1.96 in



Cut out: $\varnothing$ 35 mm / $\varnothing$ 1.37 in




Clear volume: 50 mm / 1.96 in



Cut out: $\varnothing$ 35 mm / $\varnothing$ 1.37 in



Clear volume: 50 mm / 1.96 in



Cut out: $\varnothing$ 35 mm / $\varnothing$ 1.37 in



Clear volume: 50 mm / 1.96 in

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

3

MIDI.40_adj_TR_snap in


FOLIO®

Product type	Quantity	1 CCT	2 Lens	3 Dimmability	4 Aluminum finish	5 Accessories
MIDI.40						

MOUNTING INSTRUCTION


STEP 1: Hole Preparation

Folio Opal: Pre-drilled (no action required).
Drywall / Furniture: Drill $\varnothing 35$ mm hole.

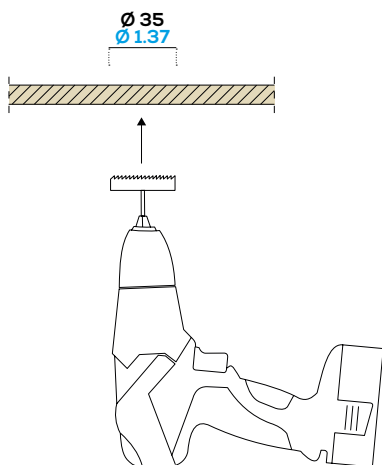


STEP 2: Cable connection

Ensure a min. **50 mm** internal height. Pull down the **24V DC** cable through the hole and pull up the spot. Connect the two parts.

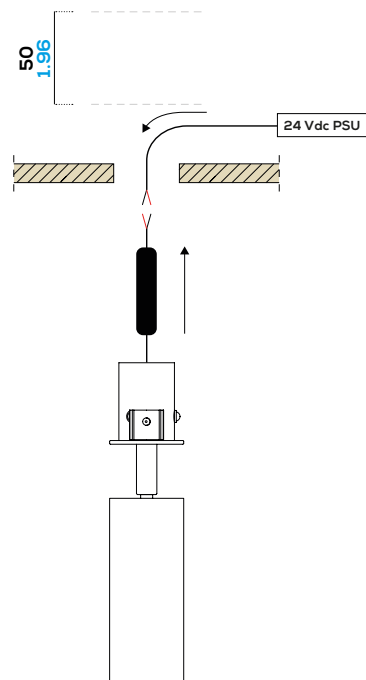



STEP 3: Spot Insertion

Push the spot upward into the hole.

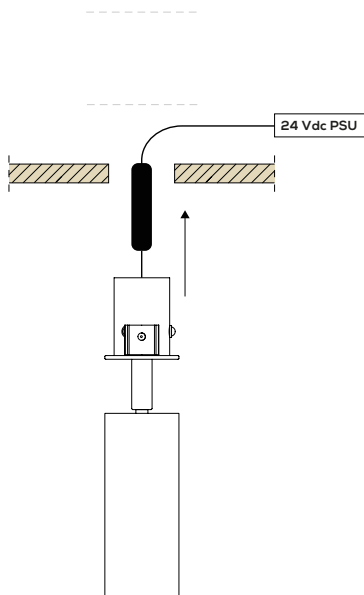

STEP 4: Installation

Once fully inserted, ensure the trim is flush with the surface. The spotlight is now ready for use.

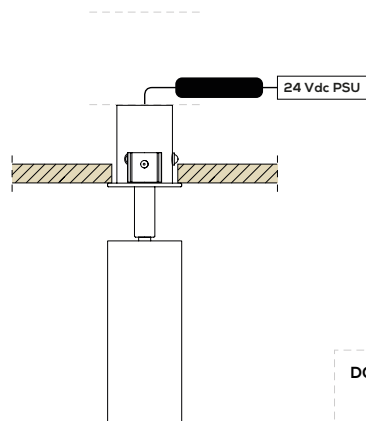

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

4


MIDI.40_adj_TR_snap in

FOLIO®


Product type	Quantity	1 CCT	2 Lens	3 Dimmability	4 Aluminum finish	5 Accessories
MIDI.40						

FEATURES

360° rotation, 0-90° tilt

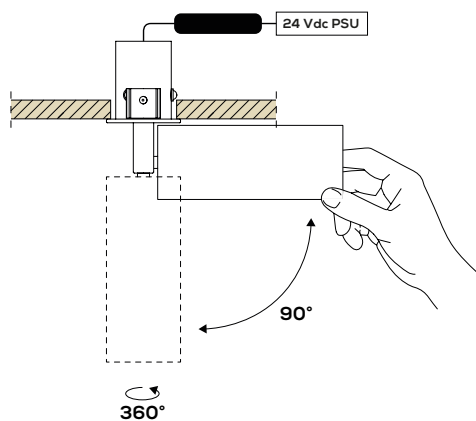

Snap in - Snap out

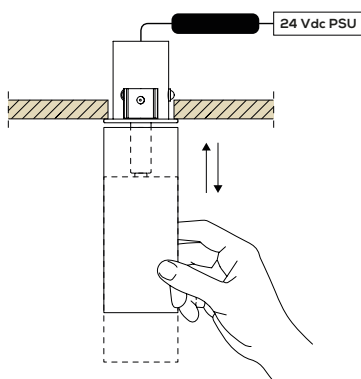

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.