



REF.  
DATE


For each item select the request option

1

# LIGHT.26\_tilt\_TL

FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| LIGHT.26     |          |       |        |               |                   |               |

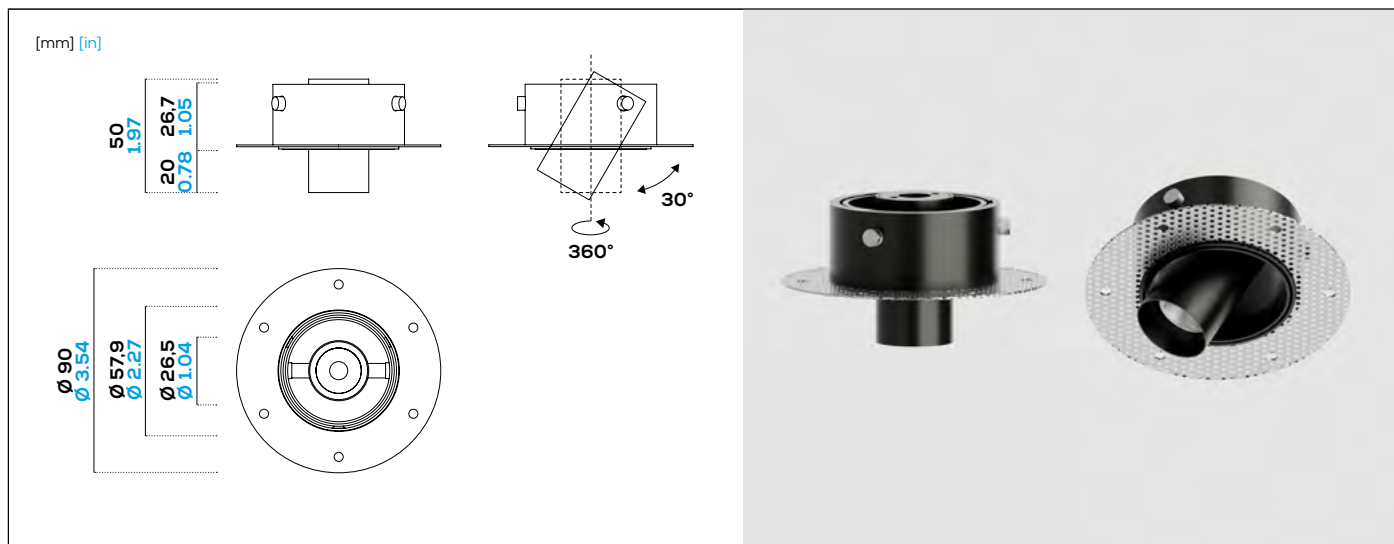

## GENERAL SPECS.

|           |                                       |
|-----------|---------------------------------------|
| Weight:   | 0,13 kg                               |
| Movement: | Adjustable: 360° rotation, 0-30° tilt |
| IP:       | 20                                    |

The Spot.Mate system is a highly versatile range of spotlights, designed to meet the most diverse architectural and lighting needs. Available in four sizes, the spotlights can be installed on various surfaces, offering multiple features and movement possibilities. Each product is entirely customizable in various aspects to perfectly suit any specific project.



## LIGHT SOURCE

|                          |                                        |
|--------------------------|----------------------------------------|
| LED type:                | Nichia                                 |
| LED Amperage:            | 700 mA                                 |
| LED Duration:            | 50 000 h.                              |
| Power:                   | 2.1 W                                  |
| Delivered Lumen:         | 220 lm                                 |
| Efficacy:                | 104.8 lm/W                             |
| Candela:                 | 74.8 cd                                |
| CRI:                     | > 90                                   |
| R9:                      | > 50                                   |
| TM30:                    | Rf: 91 Rg: 100                         |
| SDCM:                    | 3                                      |
| Color Temperature (CCT): | <input type="checkbox"/> 2700K         |
| <input type="checkbox"/> | <input type="checkbox"/> 3000K         |
| <input type="checkbox"/> | <input type="checkbox"/> 3500K         |
| <input type="checkbox"/> | <input type="checkbox"/> 4000K         |
| <input type="checkbox"/> | on request: 2000K, 2200K, 2500K, 5000K |

## OPTICS

|                          |                              |
|--------------------------|------------------------------|
| Optic Type:              | lens                         |
| Beam Angle (BA°)         | <input type="checkbox"/> 12° |
| <input type="checkbox"/> | <input type="checkbox"/> 18° |
| <input type="checkbox"/> | custom on request            |

## ELECTRICAL

|                          |                                    |
|--------------------------|------------------------------------|
| Voltage:                 | 24 Vdc (Constant Voltage)          |
| Class:                   | Class 3 24V                        |
| Driver:                  | DC/DC 24 V                         |
| Output current:          | 700 mA                             |
| Dimmerability:           | <input type="checkbox"/> 0-10 V    |
| <input type="checkbox"/> | <input type="checkbox"/> 1-10 V    |
| <input type="checkbox"/> | <input type="checkbox"/> DALI      |
| <input type="checkbox"/> | <input type="checkbox"/> DMX       |
| <input type="checkbox"/> | <input type="checkbox"/> Bluetooth |
| <input type="checkbox"/> | <input type="checkbox"/> PUSH      |
| <input type="checkbox"/> | <input type="checkbox"/> Casambi   |

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

2

# LIGHT.26\_tilt\_TL

FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| LIGHT.26     |          |       |        |               |                   |               |

## ALUMINIUM FINISHES

4

RAL/NCS/Pantone:

Polished finish:



Brushed finish:



Galvanic finish:



## ACCESSORIES

5


☐ Honeycomb

☐ Snoot




## LENS INFO

Beam Angle (BA°): 12°




Beam Angle (BA°): 18°



## APPLICATIONS

Drywall

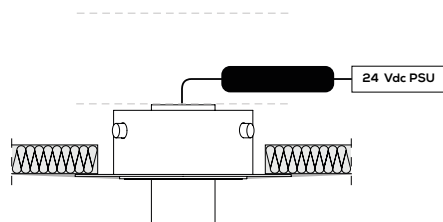

Cut out: Ø 70 mm / Ø 2.75 in



Clear volume: 30 mm / 1.18 in



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

3

# LIGHT.26\_tilt\_TL


FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| LIGHT.26     |          |       |        |               |                   |               |

## MOUNTING INSTRUCTION


### STEP 1: Hole preparation

**Folio Opal:** Pre-drilled (no action required).  
**Drywall / Furniture:** Drill  $\varnothing 70$ mm hole.

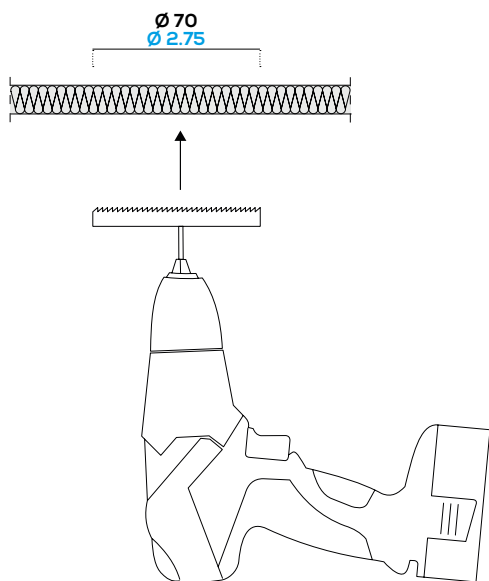


### STEP 2: Bracket fixing

Ensure a min. **30 mm** internal height. Screw the mounting bracket to the drywall and pull the 24V DC cable through.

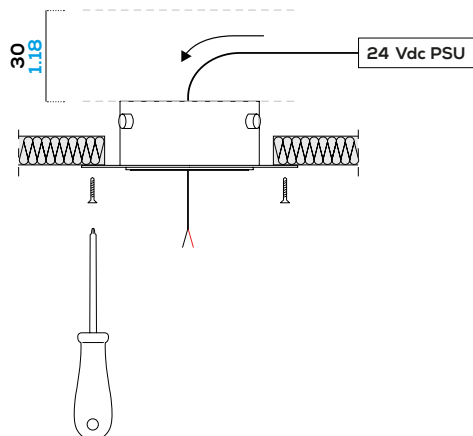


### STEP 3: Plastering & Finishing

Plaster over the mounting ring to achieve a seamless finish.

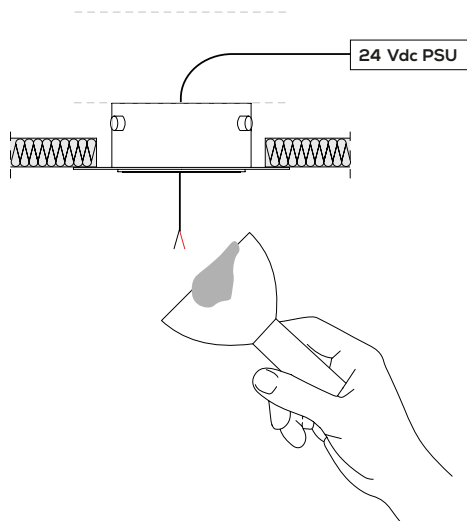

### STEP 4: Installation

Make the connection between the cables and mount the spot.

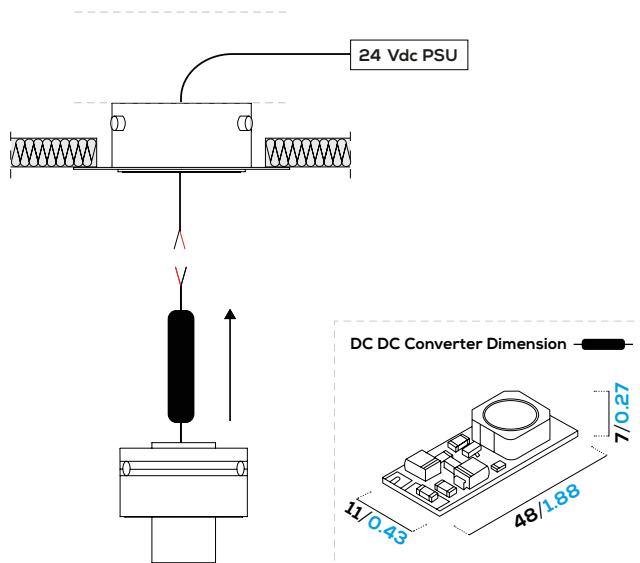

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

4


# LIGHT.26\_tilt\_TL

FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| LIGHT.26     |          |       |        |               |                   |               |


## STEP 5:

Push the spot upward into the hole.  
Once fully inserted, the spotlight is now ready for use.

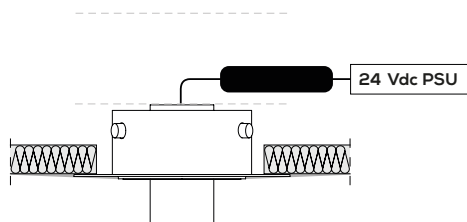

## FEATURES

360° rotation \_ 0-30° tilt

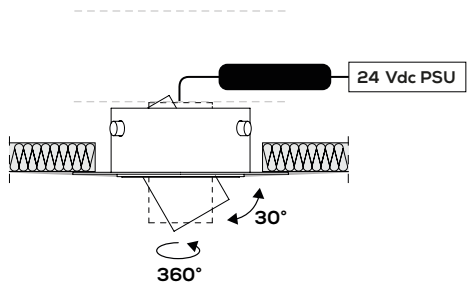

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.