



REF.
DATE



For each item select the request option

1

MICRO.15 + THIN.15

FOLIO®

Product type	Quantity	☐ 1 CCT	☐ 2 Lens	☐ 3 Dimmerability	☐ 4 Aluminum finish
MICRO					

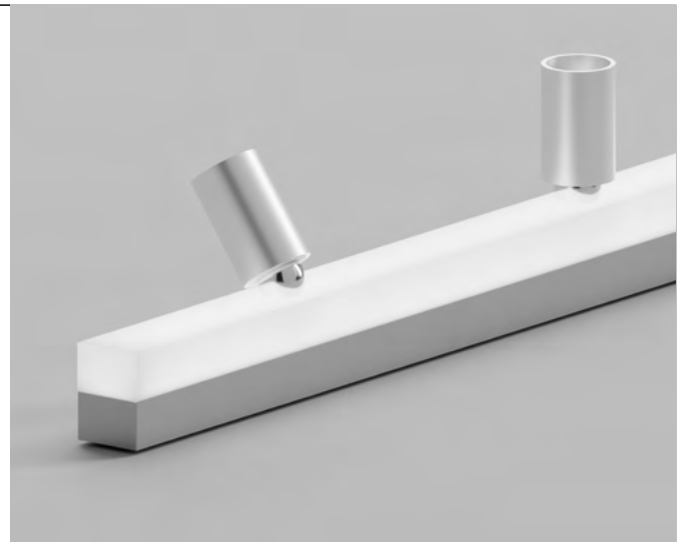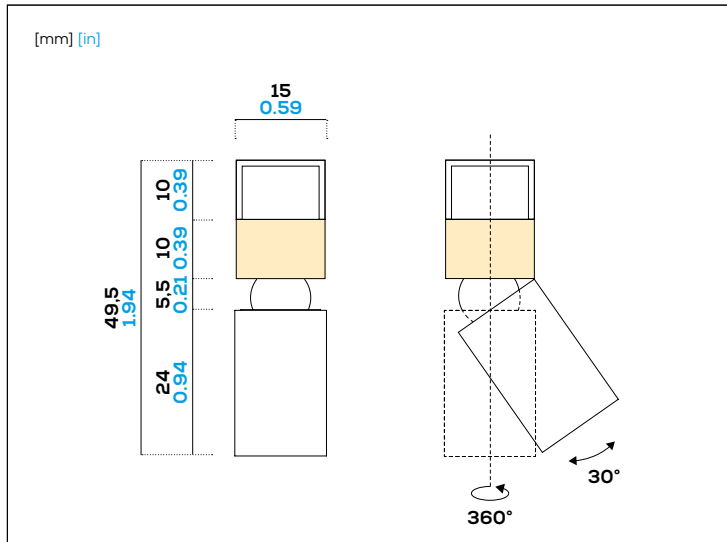

GENERAL SPECS.

Weight:	0,01 kg
Movement:	Adjustable: 360° rotation, 0-40° tilt
IP:	20

The Spot.Mate system is a highly versatile range of spotlights, designed to meet the most diverse architectural and lighting needs. Available in four sizes, the spotlights can be installed on various surfaces, offering multiple features and movement possibilities. Each product is entirely customizable in various aspects to perfectly suit any specific project.



LIGHT SOURCE

LED type:	Nichia
LED Amperage:	500 mA
LED Duration:	50 000 h.
Power:	1.5 W
Delivered Lumen:	145 lm
Efficacy:	96.6 lm/W
Candela:	
CRI:	> 90
R9:	> 80
TM30:	Rf: 91 Rg: 100
SDCM:	2
Color Temperature (CCT):	☐ 2700K
☐ 3000K	
☐ 3500K	
☐ 4000K	
☐ on request:	
☐ 2000K, 2200K, 2500K, 5000K	

OPTICS

Optic Type:	lens
Beam Angle (BA°)	☐ 15°
☐ 25°	
☐ 35°	
☐ costum on request	

ELECTRICAL

Voltage:	24V DC (Constant Voltage)
Class:	Class 3 24V
Driver:	DC/DC 24 V
Output current:	500 mA
Dimmerability:	☐ 0-10 V
☐ 1-10 V	
☐ DALI	
☐ DMX	
☐ Bluetooth	
☐ PUSH	

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

2

MICRO.15 + THIN.15

FOLIO®

Product type	Quantity	☐ 1 CCT	☐ 2 Lens	☐ 3 Dimmerability	☐ 4 Aluminum finish
MICRO					

ALUMINIUM FINISHES

☐ 4

RAL/NCS/Pantone:

Polished finish:



Brushed finish:




Galvanic finish:




LENS INFO


Beam Angle (BA°): 15°



Beam Angle (BA°): 25°



Beam Angle (BA°): 35°




INSTALLATION

Magnetic fastening


1. Attach the magnetic plate to the material

2. Snap the magnet to the magnetic plate

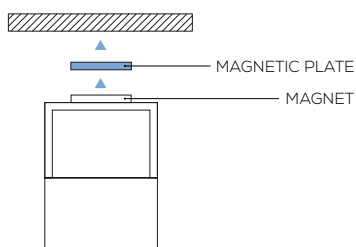


POSITION GUIDELINES

OPTION .A



OPTION .B



Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.