



REF.  
DATE


For each item select the request option

1

# LIGHT.26\_fix\_TL\_on board

FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| LIGHT.26     |          |       |        |               |                   |               |

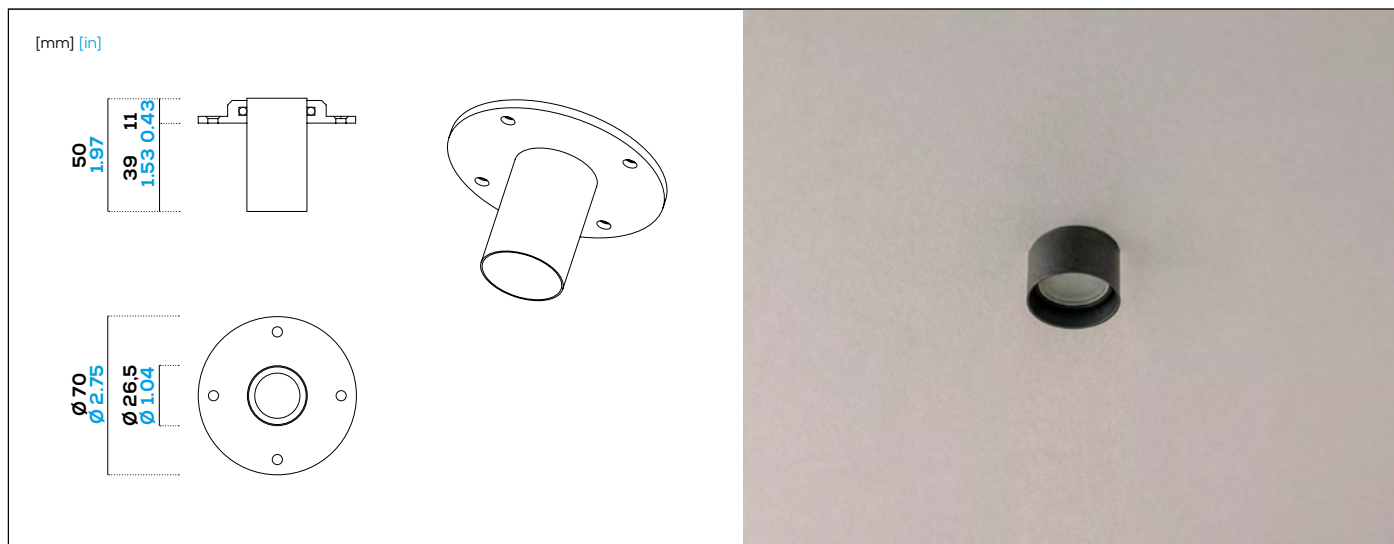

## GENERAL SPECS.

|           |                                       |
|-----------|---------------------------------------|
| Weight:   | 0,15 kg                               |
| Movement: | Adjustable: 360° rotation, 0-90° tilt |
| IP:       | 20                                    |

The Spot.Mate system is a highly versatile range of spotlights, designed to meet the most diverse architectural and lighting needs. Available in four sizes, the spotlights can be installed on various surfaces, offering multiple features and movement possibilities. Each product is entirely customizable in various aspects to perfectly suit any specific project.



## LIGHT SOURCE

|                                     |                                                                    |
|-------------------------------------|--------------------------------------------------------------------|
| LED type:                           | Nichia                                                             |
| LED Amperage:                       | 700 mA                                                             |
| LED Duration:                       | 50 000 h.                                                          |
| Power:                              | 2.1 W                                                              |
| Delivered Lumen:                    | 220 lm                                                             |
| Efficacy:                           | 104.8 lm/W                                                         |
| Candela:                            | 74.8 cd                                                            |
| CRI:                                | > 90                                                               |
| R9:                                 | > 50                                                               |
| TM30:                               | Rf: 91 Rg: 100                                                     |
| SDCM:                               | 3                                                                  |
| Color Temperature (CCT):            | <input type="checkbox"/> 2700K                                     |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> 3000K                                     |
|                                     | <input type="checkbox"/> 3500K                                     |
|                                     | <input type="checkbox"/> 4000K                                     |
|                                     | <input type="checkbox"/> on request:<br>2000K, 2200K, 2500K, 5000K |

## OPTICS

|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| Optic Type:                         | lens                                       |
| Beam Angle (BA°)                    | <input type="checkbox"/> 12°               |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> 18°               |
|                                     | <input type="checkbox"/> custom on request |

## ELECTRICAL

|                                     |                                    |
|-------------------------------------|------------------------------------|
| Voltage:                            | 24 Vdc (Constant Voltage)          |
| Class:                              | Class 3 24V                        |
| Driver:                             | DC/DC 24 V                         |
| Output current:                     | 700 mA                             |
| Dimmerability:                      | <input type="checkbox"/> 0-10 V    |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> 1-10 V    |
|                                     | <input type="checkbox"/> DALI      |
|                                     | <input type="checkbox"/> DMX       |
|                                     | <input type="checkbox"/> Bluetooth |
|                                     | <input type="checkbox"/> PUSH      |
|                                     | <input type="checkbox"/> Casambi   |

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

2

# LIGHT.26\_fix\_TL\_on board

FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| LIGHT.26     |          |       |        |               |                   |               |

## ALUMINIUM FINISHES

4

RAL/NCS/Pantone:

Polished finish:



Brushed finish:



Galvanic finish:



## ACCESSORIES

5


☐ Honeycomb

☐ Snoot




## LENS INFO

Beam Angle (BA°): 12°



Beam Angle (BA°): 18°





## APPLICATIONS

Folio Opal\*



Other Material Application

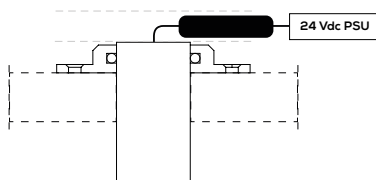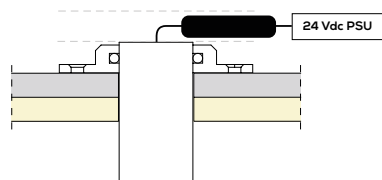

Cut out:  $\varnothing 27 \text{ mm}$  /  $\varnothing 1.06 \text{ in}$



Clear volume:  $20 \text{ mm}$  /  $0.78 \text{ in}$

Cut out:  $\varnothing 27 \text{ mm}$  /  $\varnothing 1.06 \text{ in}$



Clear volume:  $20 \text{ mm}$  /  $0.78 \text{ in}$

\*The fixture is supplied fully assembled and does not require additional mounting of the light source.

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.  
DATE

For each item select the request option

3

# LIGHT.26\_fix\_TL\_on board


FOLIO®

| Product type | Quantity | 1 CCT | 2 Lens | 3 Dimmability | 4 Aluminum finish | 5 Accessories |
|--------------|----------|-------|--------|---------------|-------------------|---------------|
| LIGHT.26     |          |       |        |               |                   |               |

## MOUNTING INSTRUCTION


### STEP 1: Ready to install

Folio Opal supplied with integrated mounting sleeve and pre-cut hole.




### STEP 2:

Pull the 24V cable through the opening for external connection.

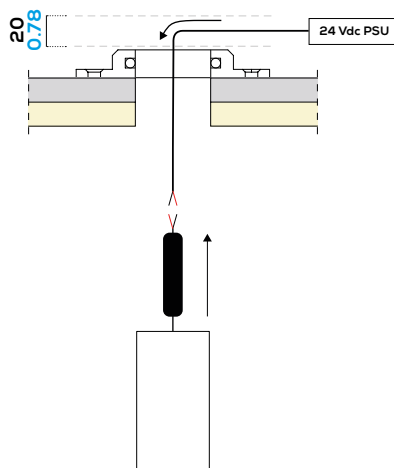



### STEP 3:

Connect the spot to the power supply.

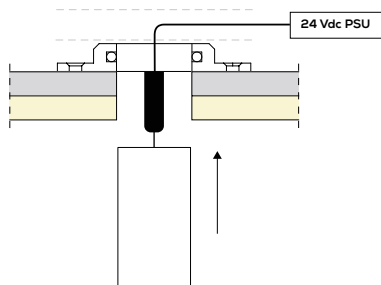

### STEP 4: Installation

Insert the spot into the sleeve until it clicks into place.

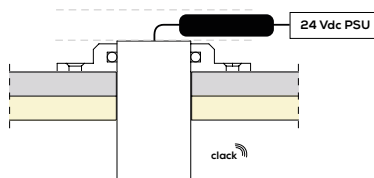

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.