



REF.
DATE


For each item select the request option

1

MIDI.40_adj_recessed

FOLIO®

Product type	Quantity	1 CCT	2 Lens	3 Dimmability	4 Aluminum finish	5 Accessories
MIDI.40						

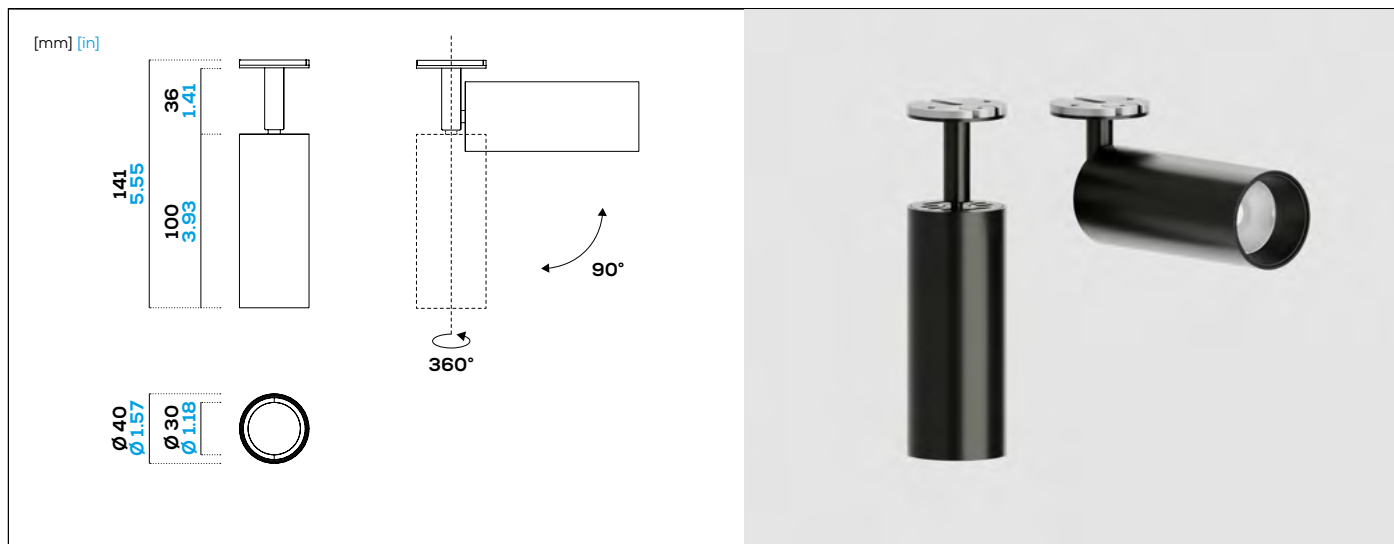

GENERAL SPECS.

Weight:	0,12 kg
Movement:	Adjustable: 360° rotation, 0-90° tilt
IP:	20

The Spot.Mate system is a highly versatile range of spotlights, designed to meet the most diverse architectural and lighting needs. Available in four sizes, the spotlights can be installed on various surfaces, offering multiple features and movement possibilities. Each product is entirely customizable in various aspects to perfectly suit any specific project.



LIGHT SOURCE

LED type:	Nichia
LED Amperage:	500 mA
LED Duration:	50 000 h.
Power:	6.1 W
Delivered Lumen:	650 lm
Efficacy:	106.5 lm/W
Candela:	221 cd
CRI:	> 90
R9:	> 50
TM30:	Rf: 91 Rg: 100
SDCM:	2
Color Temperature (CCT):	☐ 2700K
☐	☐ 3000K
☐	☐ 3500K
☐	☐ 4000K
☐	on request: 2000K, 2200K, 2500K, 5000K

OPTICS

Optic Type:	lens
Beam Angle (BA°)	☐ 12°
☐	☐ 19°
☐	☐ 25°
☐	custom on request

ELECTRICAL

Voltage:	24 Vdc (Constant Voltage)
Class:	Class 3 24V
Driver:	DC/DC 24 V
Output current:	500 mA
Dimmerability:	☐ 0-10 V
☐	☐ 1-10 V
☐	☐ DALI
☐	☐ DMX
☐	☐ Bluetooth
☐	☐ PUSH
☐	☐ Casambi

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

2

MIDI.40_adj_recessed

FOLIO®


Product type	Quantity	1 CCT	2 Lens	3 Dimmability	4 Aluminum finish	5 Accessories
MIDI.40						

ALUMINIUM FINISHES

4

RAL/NCS/Pantone:

Polished finish:



Brushed finish:



Galvanic finish:



ACCESSORIES

5


☐ Honeycomb

☐ Snoot




LENS INFO


Beam Angle (BA°): 12°



Beam Angle (BA°): 19°




Beam Angle (BA°): 25°



APPLICATIONS

Furniture



Cut out: $\varnothing$ 40,5 mm, thk 4 mm / $\varnothing$ 1.59 in, thk 0.15 in



Clear volume: 15 mm / 0.59 in

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

3

MIDI.40_adj_recessed


FOLIO®

Product type	Quantity	1 CCT	2 Lens	3 Dimmability	4 Aluminum finish	5 Accessories
MIDI.40						

MOUNTING INSTRUCTION

STEP 1: Hole preparation


Milling and drilling operations must be performed by specialized personnel.



Mill: Ø 40.5 x H 4 mm
Drill: Ø 8 mm


STEP 2: Preparation

Ensure a min. space to pass the cable in the internal height.
Screw the component to the shelf.

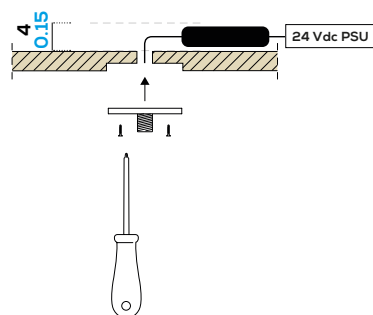



STEP 3: Installation

Pass the cable through the mounting bracket and connect the cables.

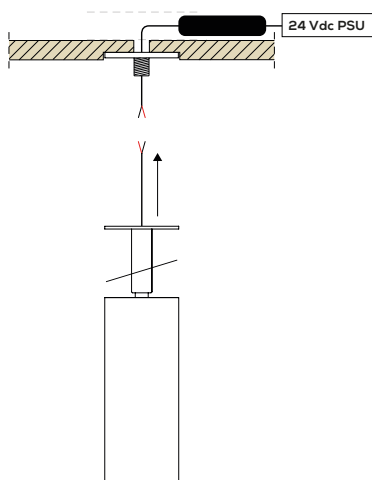

STEP 4: Connection

Attach the spotlight via the magnetic connection.

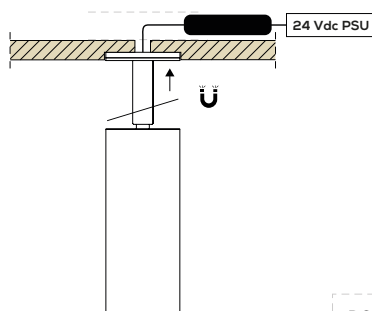

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.



REF.
DATE

For each item select the request option

4


MIDI.40_adj_recessed

FOLIO®

Product type	Quantity	1 CCT	2 Lens	3 Dimmability	4 Aluminum finish	5 Accessories
MIDI.40						


STEP 5: Installation

Once fully inserted, ensure the trim is flush with the surface.
The spotlight is now ready for use.

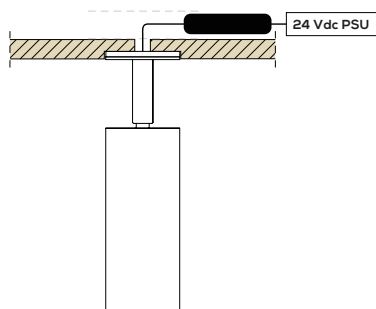

FEATURES

360° rotation, 0-90° tilt

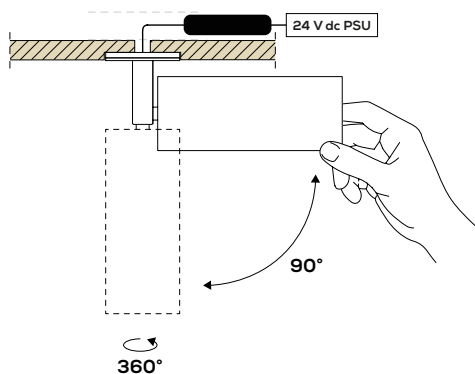

Images / 3D / sections and the relative details shown in the following pages are generic and indicative. The number and position of the fixing points and fasteners may change during the production phase. The type, quantity and position of the Folio panels' power cables are indicative.